

MDP-2303

Intelligent Building IP Video Intercom


Features / Functions

- ▶ 4.3-inch color TFT LCD screen
- ▶ With infrared ray LED lights
- ▶ Build-in RFID card reader, support Mifare (EasyCard)
- ▶ Power over Ethernet (PoE), Indoor wiring and construction can be simplified, easy to maintain in the future.
- ▶ Support VoIP SIP protocol
- ▶ Can be used with smartphone APP cloud services
- ▶ Provide intercom and property management functions



Product dimensions and installation

Specifications

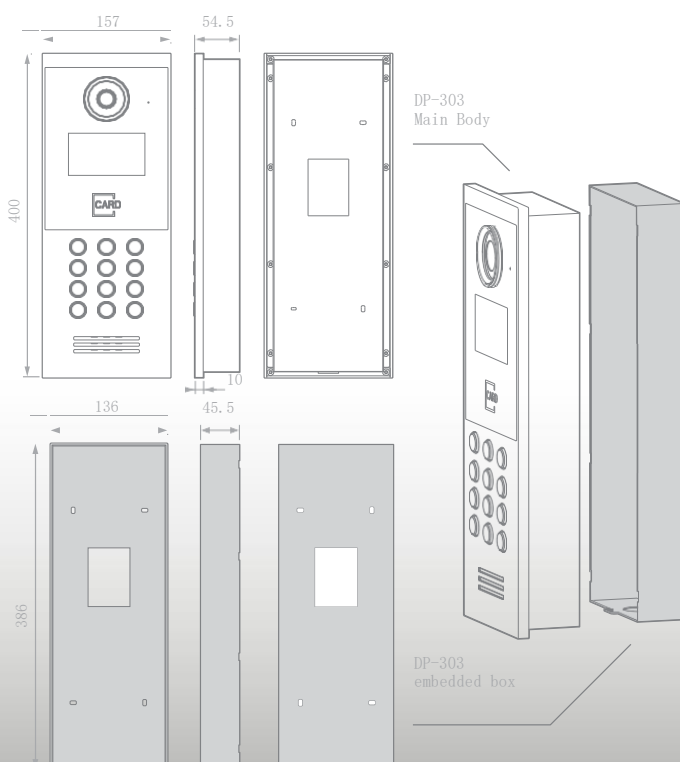

Screen size	4.3-inch color TFT LCD screen
IP camera	720P (1280 x 720) HD CMOS camera sensor
Exterior	Silver metal brushed panel
Fill light	Build-in infrared ray 7 LED lights for night vision function
Access control card	Build-in RFID card reader, support Mifare (EasyCard)
Interface reader	IP network Wiegand
Ring volume	Can adjust the volume independently
Audio output	Build-in 3-watt speaker
Interface	RJ-45·DI·DO
DO	One Relay output can control the door lock
DI	One DI that can connect to a door/window sensor
Mode of operation	Physical buttons
Power supply	IEEE802.3af PoE Power over Ethernet
Dimensions	157mm × 400 mm × 54.5 mm
Embedded dimensions	137mm × 387 mm × 47mm
Operating Environment	temperature -25°C ~ +55°C; Humidity 10% ~ 90% RH (non-condensing)
Waterproof level	IP65
Installation method	Embed/Wall-mounted